

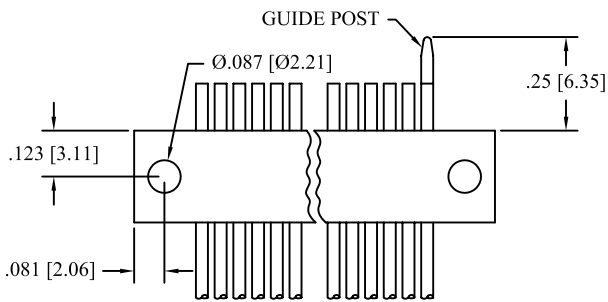



Series DRS

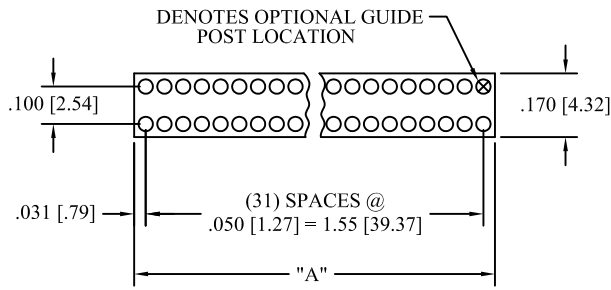


MOUNTING HOLES USE 3 CONTACT CAVITIES PER HOLE
GUIDE POSTS USE 1 CONTACT CAVITY PER GUIDE POST

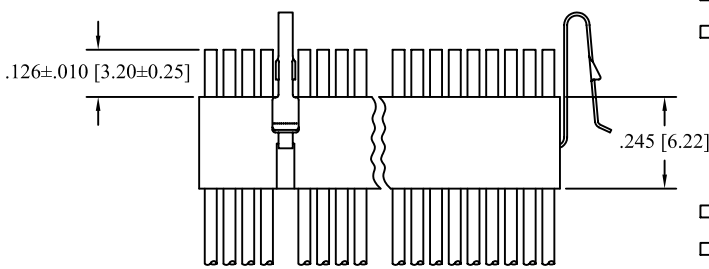



LATCHES USE 1 CONTACT CAVITY PER LATCH

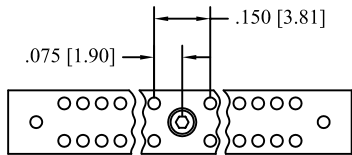


60 CONTACTS MAX, 2 GUIDE POSTS
WITH CENTER RETAINING SCREW

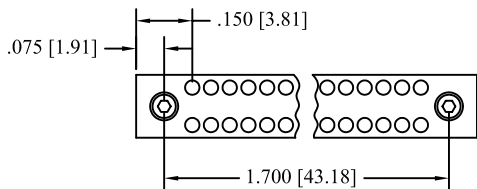


64 CONTACTS MAX WITH
END RETAINING SCREWS

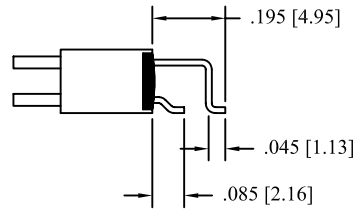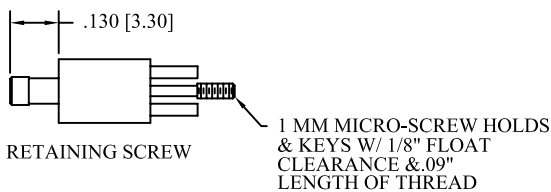


TYPE AA
Ø.016 [.41] TAIL (TYP)

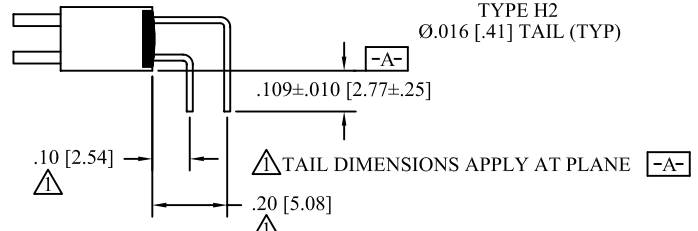


TYPE H2
Ø.016 [.41] TAIL (TYP)




TYPE DD
Ø.016 [.41] TAIL (TYP)




TYPE V V
Ø.016 [.41] TAIL (TYP)



TYPE FF
.030 MAX [.76]
TAIL WIDTH (TYP)

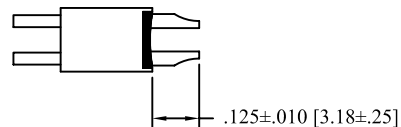

TYPE SS

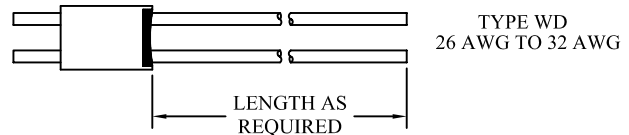

DIMENSIONS

To determine connector length (Dim "A")	
Multiply the number of contact cavities in 1 row by .050":	_____
Add fixed end length (constant):	.012
Add 3 contact cavities for each mounting hole: (.150)	_____
Add 1 contact cavity for each latch: (.050)	_____
Add 1 contact cavity for each guide post hole: (.050)	_____
Add 3 contact cavities for each retaining screw: (.150)	_____
Total Length:	_____
Notes:	
Maximum length 1.85 [46.99]	
Maximum number of contact cavities is 64. Number of contacts must be reduced to accommodate hardware and mounting holes.	