


MATERIALS & SPECIFICATIONS

INSULATOR: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138
 CONTACT: BERYLLIUM COPPER PER ASTM B194, C17200. GOLD PLATED PER ASTM B488, (HARD GOLD) TYPE II CODE C CLASS 1.27
 TERMINATION: COPPER ALLOY PER MIL-DTL-83513 MATT SOLDER PLATE
 .0001-.0002 THICK PER AMS-P-81728
 CURRENT CAPACITY 3 AMP MAX
 CONTACT RESISTANCE 65 MILLIOHM MAX
 PERFORMANCE: TESTED TO AND PASSED THE PERFORMANCE SPECIFICATIONS OF TABLE VII OF MIL-DTL-83513

PART NO.	A22015-001	REV	ECO	DATE	APP
		B	94225	01-16-07	TLM

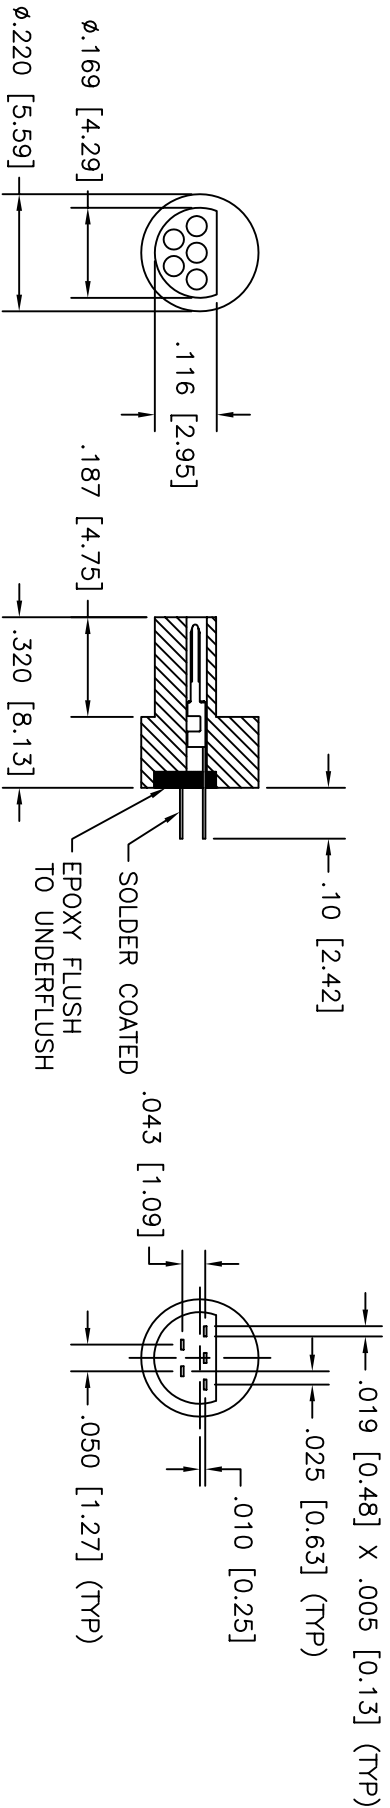

LOADING VIEW
 LESS EPOXY

CATALOG DESCRIPTION: MCP-05-DD

FOR LATEST REVISION OF DRAWING
 SEE OMNETICS WEBSITE: WWW.OMNETICS.COM

MCP		-TOLERANCES- UNLESS OTHERWISE NOTED DIMENSIONS IN INCHES		OMNETICS CONNECTOR CORPORATION		TITLE:		CAGE CODE 61873	
2	PL DEC	$\pm .01$	DFTM.	TEP	DATE	04-07-06	(5) PIN MALE	SHEET 1	REV B
3	PL DEC	$\pm .005$	CHK'D.		DATE		CIRCULAR	OF 1	
4	PL DEC	$\pm .0005$	APP'D.		DATE		CONNECTOR	SCALE: 4:1	
	ANGLES	\pm							

REF: OMNETICS