

PART NO.	A98002-025	REV	ECO	DATE	APP
		A	101598	05-26-15	TLM

MATERIALS

HOUSING:

ALUMINUM 6061-T6, NICKEL
PLATE PER SAE-AMS-2404

INSULATOR:


LIQUID CRYSTAL POLYMER (LCP)
PER ASTM D5138

CONTACT:


BERYLLIUM COPPER PER ASTM
B194, C17200, GOLD PLATED
PER ASTM B488, (HARD GOLD)
TYPE II CODE C, CLASS 1.27

TERMINATION:

SOLDER COATED WITH SN63A
PER J-STD-006 OR AMS-P-
81728

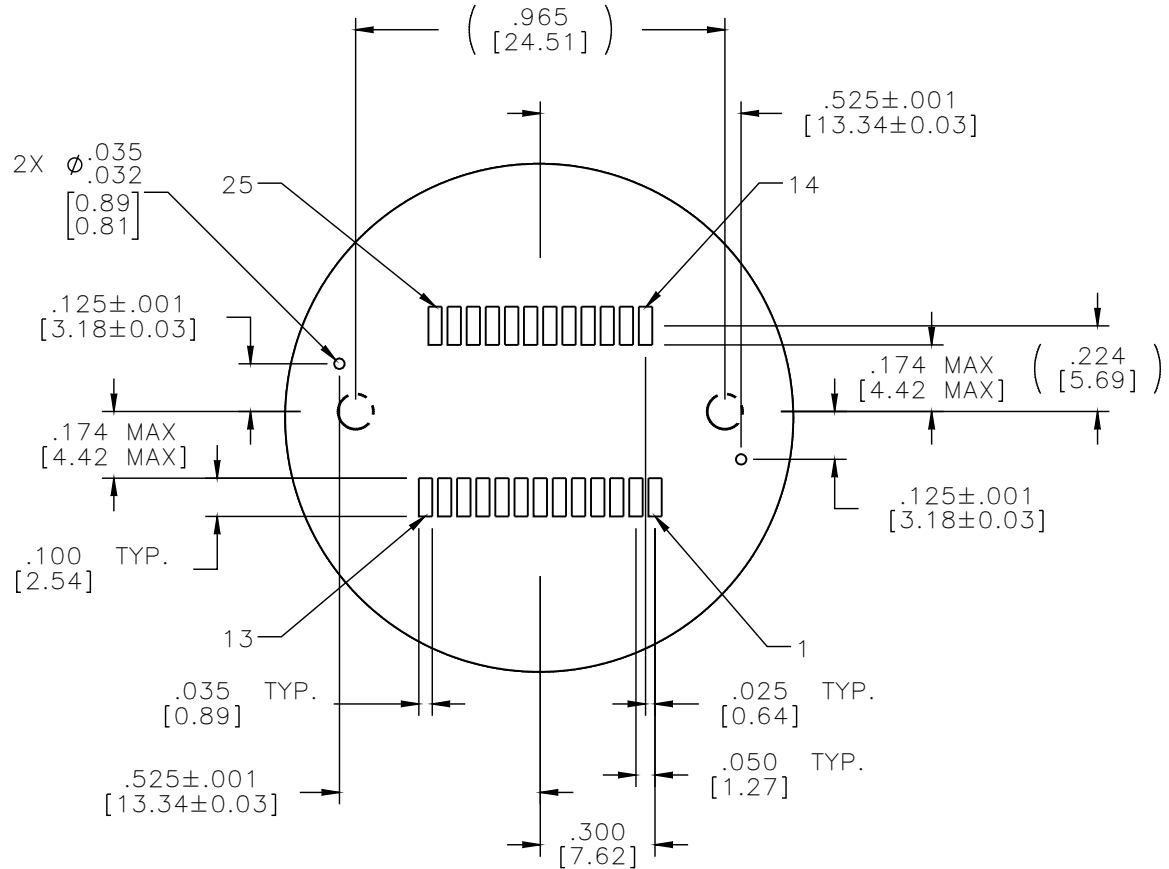

SUGGESTED BOARD LAYOUT

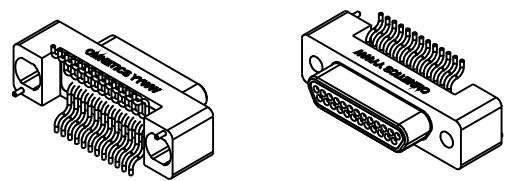

ACTUAL SIZE

NOTE:
DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

MMDP SLDW	THIRD ANGLE	THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.	OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM		CAGE CODE 61873	
	-TOLERANCES-				DWG NO. A98002-025	
	UNLESS OTHERWISE NOTED				TITLE: (25) PIN MALE VERTICAL SURFACE MOUNT MICRO-D	SHEET 2 OF 2
	DIMENSIONS IN INCHES				DFTM. BCV DATE 05-26-15	REV A
2 PL DEC±.01	CHK'D.	APP'D.	SCALE: 2:1			
3 PL DEC±.005						
4 PL DEC±.0005						
ANGLES ± 1°						