

## PART NO. A98033-025 APP REV ECO DATE 104484 05-21-18 TLM

## MATERIALS

HOUSING:

ALUMINUM 6061, NICKEL PLATE (500 MICROINCHES MINIMUM) PER SAE-AMS-2404

INSULATOR:

LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138

CONTACT:


BERYLLIUM COPPER PER ASTM B194, C17200, GOLD PLATED PER ASTM B488, (HARD GOLD) TYPE II CODE C, CLASS 1.27


TERMINATION:

SOLDER COATED WITH SN63A PER J-STD-006 OR AMS-P-81728

LATCH:

STAINLESS STEEL, NICKEL PLATE PER SAE-AMS-2404

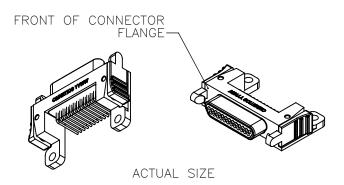

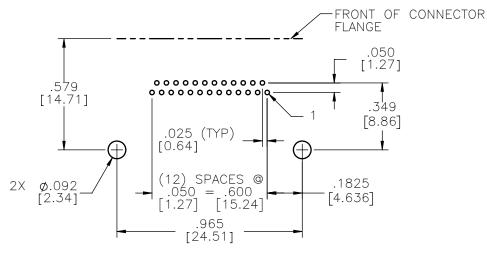

SUGGESTED HOLE PATTERN

## NOTE:

DIMENSIONS IN [ ] ARE IN MILLIMETERS UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY

_				
	THIRD ANGLE 🕀 🖯	THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR		
Ιz	-TOLERANCES-			
ΙΞ	UNLESS OTHERWISE NOTED  DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNE			HITEN PERMISSION FROM OMNETICS CONNECTOR CORP.
Τ	DIMENSIONS IN INCHES	DETM TIM	DATE	TITLE:
╙	2 PL DEC± .01	DI TIVI. ILIVI	03-21-13	(25) PIN MALE
U	3 PL DEC + .005	CUIV'D	DATE	( /
	4 PL DEC± .0005	CHK D.		90° BOARD MOUNT
		ADD'D	DATE	MICRO-D CONNECTOR
1<	ANGLLS ± 1	IAPP D.		MICKO B CONNECTOR

## CONNECTOR CORPORATION A98033-025

7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNÉTICS.COM

CAGE CODE 61873

SHEET 2 OF 2 REV SCALE: 2: