


## ORDERING GUIDE

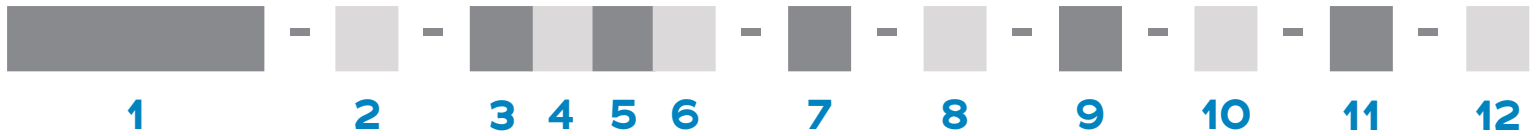

<b>1</b> Series	<b>MNSOP</b> Metal Nano Socket Offset Panel											
<b>2</b> Number Of Contacts	<b>09</b>	<b>15</b>	<b>21</b>	<b>25</b>	<b>31</b>	<b>37</b>	<b>51</b>	<b>65</b>	<b>69</b>	<b>85</b>	<b>91</b>	
<b>3</b> Termination Type	<b>A</b> Horizontal Surface Mount						<b>DD</b> Thru-Hole Straight					
	<b>FF</b> Flex Mount						<b>WD</b> Discrete Wires					
<b>4</b> Wire Gage*	<b>0</b> 30 AWG (STD)					<b>2</b> 32 AWG						
<b>5</b> Wire Type*	<b>Q</b> NEMA HP3 (formerly M16878/4 and /6)							<b>XX.X</b> M22759/33 (30 AWG only)				
<b>6</b> Wire Length*	<b>18.0</b> 18.00" (STD)							<b>XX.X</b> Custom Length				
<b>7</b> Color Scheme*	<b>C</b> 10 repeating colors per MIL STD 681							<b>Y</b> All other wire colors				
<b>8</b> Shell Material & Finish	<b>N</b> Aluminum Shell, Electroless Nickel Plated						<b>CD</b> Aluminium shell, Cadmium Plated					
	<b>B</b> Aluminium Shell, Black Anodized						<b>S</b> Stainless steel Shell, Passivated					
	<b>T</b> Titanium Shell, Unplated											
<b>9</b> Common Options	<b>ETH</b> End Threaded Hole, #0-80						<b>EJS</b> End Jack Screw					
	<b>NTH</b> Non-Threaded Holes for mounting to the board											
	<b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw)											
	<b>HT</b> High Temp. Epoxy						<b>RH</b> RoHS Compliant					
	<b>CS</b> Customer Supplied Material											
<b>10</b> Shield / Jacket*	<b>D</b> Slip-on Braid	<b>E</b> Machine Braid	<b>F</b> Flexo Braid	<b>J</b> Nomex Braid	<b>ST</b> Shrink Tube							
<b>11</b> Mod Codes	<b>M10</b> Custom Keying						<b>M50</b> Space Grade Nano-D, SPT1					
	<b>M53</b> Space Grade Nano-D, SPT2											
<b>12</b> Special Instructions	<b>YYY</b> Describe anything that is not covered in standard options											

\* WD only