## ORDERING GUIDE

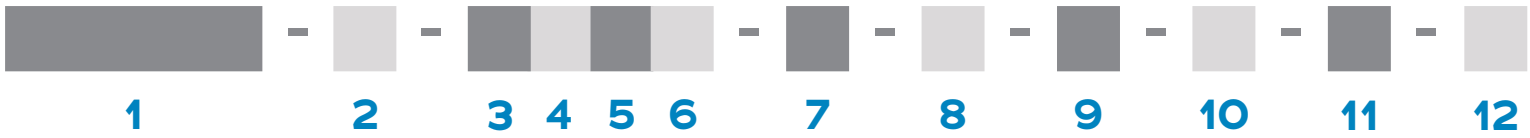


| | | |
|---|---|---|
| 1 | Series | **MNSOP** Metal Nano Socket Offset Panel |
| 2 | Number Of Contacts | **09** **15** **21** **25** **31** **37** **51** **65** **69** **85** **91** |
| 3 | Termination Type | **A** Horizontal Surface Mount<br>**FF** Flex Mount<br>**DD** Thru-Hole Straight<br>**WD** Discrete Wires |
| 4 | Wire Gage* | **0** 30 AWG (STD)<br>**2** 32 AWG |
| 5 | Wire Type* | **Q** NEMA HP3 (formerly M16878/4 and /6)<br>**XX.X** M22759/33 (30 AWG only) |
| 6 | Wire Length* | **18.0** 18.00" (STD)<br>**XX.X** Custom Length |
| 7 | Color Scheme* | **C** 10 repeating colors per MIL STD 681<br>**Y** All other wire colors |
| 8 | Shell Material & Finish | **N** Aluminum Shell, Electroless Nickel Plated<br>**B** Aluminium Shell, Black Anodized<br>**T** Titanium Shell, Unplated<br>**CD** Aluminium shell, Cadmium Plated<br>**S** Stainless steel Shell, Passivated |
| 9 | Common Options | **ETH** End Threaded Hole, #0-80<br>**EJS** End Jack Screw<br>**NTH** Non-Threaded Holes for mounting to the board<br>**YY** Non Standard Hardware (threaded holes, thumb screws, #2-56 screw)<br>**HT** High Temp. Epoxy<br>**RH** RoHS Compliant<br>**CS** Customer Supplied Material |
| 10 | Shield / Jacket* | **D** Slip-on Braid **E** Machine Braid **F** Flexo Braid **J** Nomex Braid **ST** Shrink Tube |
| 11 | Mod Codes | **M10** Custom Keying<br>**M50** Space Grade Nano-D, SPT1<br>**M53** Space Grade Nano-D, SPT2 |
| 12 | Special Instructions | **YYY** Describe anything that is not covered in standard options |

* WD only