


ORDERING GUIDE

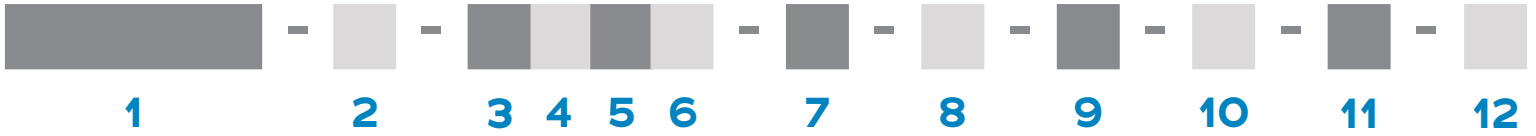

1 Series	MNPL Metal Nano Pin Latch MNSL Metal Nano Socket Latch MNSLP Metal Nano Socket Latch Panel
2 Number Of Contacts	09 15 21 25 31 37 51 65
3 Termination Type	AA Horizontal Surface Mount H4 Horizontal Thru-Hole DD Thru-Hole Straight WD Discrete Wires FF Flex Tail
4 Wire Gage*	0 30 AWG (STD) 2 32 AWG
5 Wire Type*	Q NEMA HP3 (formerly M16878/4 and /6) XX.X M22759/33 (30 AWG only)
6 Wire Length*	18.0 18.00" (STD) XX.X Custom Length
7 Color Scheme*	C 10 Repeating Colors Per MIL STD 681 Y All Other Wire Colors
8 Shell Material & Finish	N Aluminum Shell, Electroless Nickel Plated B Aluminium Shell, Black Anodized T Titanium Shell, Unplated CD Aluminium shell, Cadmium Plated S Stainless steel Shell, Passivated
9 Common Options	SR Strain Relief ** YY Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) HT High Temp. Epoxy BS1 Standard Straight Backshell BS3 90/RA Oval BSY Custom Backshell RH RoHS Compliant BS2 45 Oval BS4 2 Piece BS CS Customer Supplied Material
10 Shield / Jacket*	D Slip-on Braid E Machine Braid F Flexo Braid J Nomex Braid ST Shrink Tube
11 Mod Codes	M10 Custom Keying M53 Space Grade Nano-D, SPT2 M50 Space Grade Nano-D, SPT1
12 Special Instructions	YYY Describe anything that is not covered in standard options

* WD only ** MNPL & MNSL only