

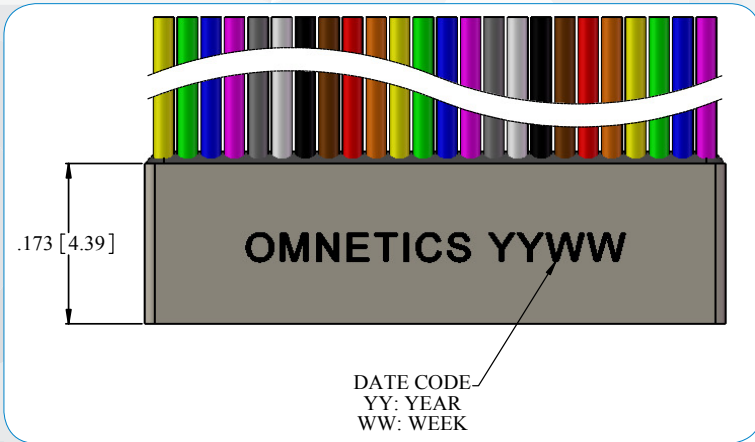
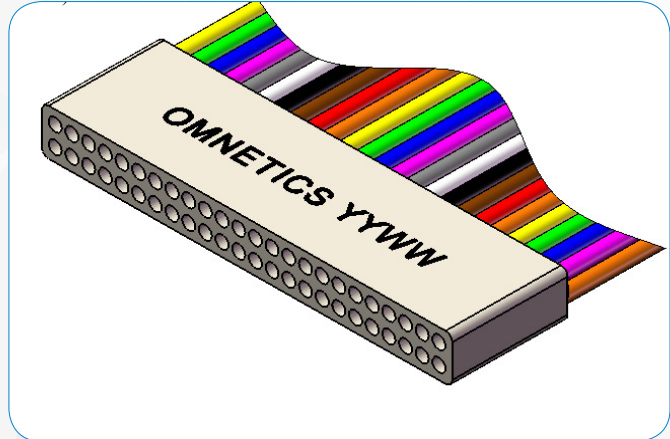


Dual Row Nano Strip

NPD-WD/WC LAYOUT

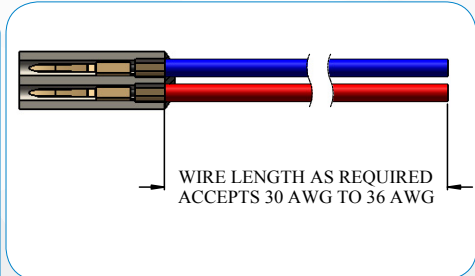

130

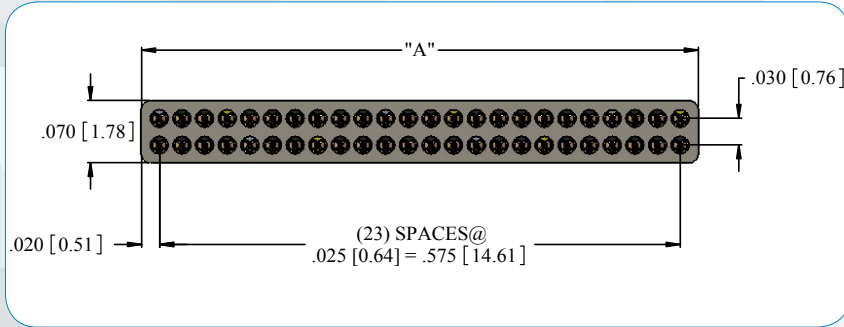

DIMENSIONS FOR "A"







To determine connector length "A":

Add the total number of contacts in one row	_____
Add 1 contact cavity for each guide post hole in the same row	_____
Total contact cavities in a single row	_____
Subtract 1 from the total to get the number of cavity spaces and multiply by .025"	_____
Add fixed end length constant	.040
Total Length (Dimension A):	_____

Notes: Maximum length .615" (15.62). Maximum number of contact cavities is 80. Number of contacts must be reduced to accommodate guide post holes. Default locations for guide post holes may be changed by customer. Dimensions in [] are in Millimeters unless otherwise noted and are for reference only.

Dual Row Nano Strip

NSD-WD/WC LAYOUT

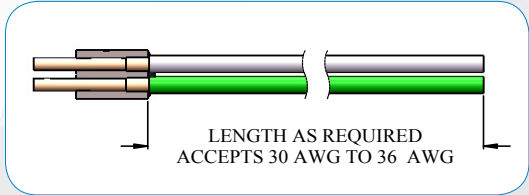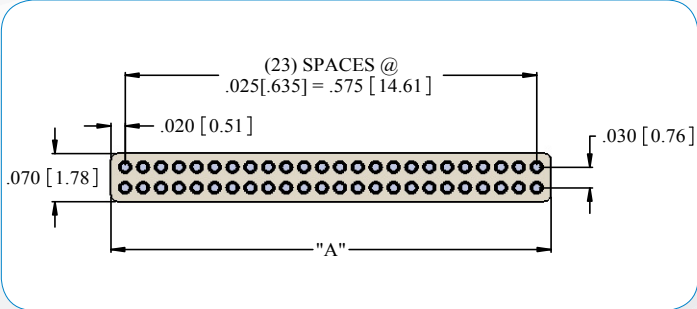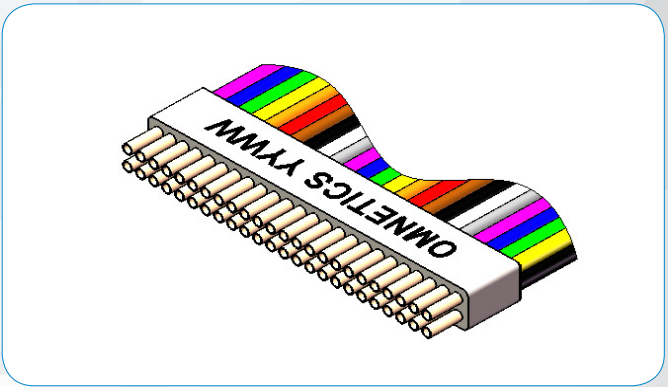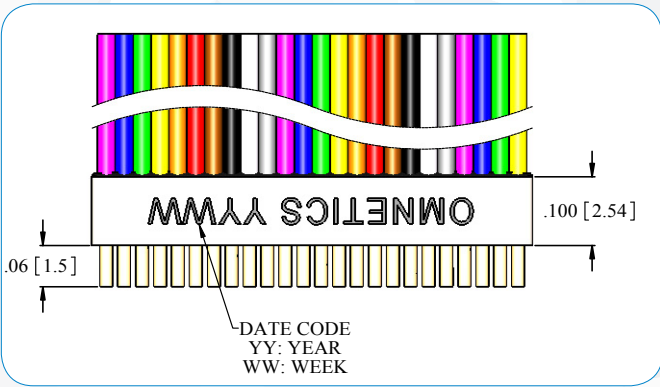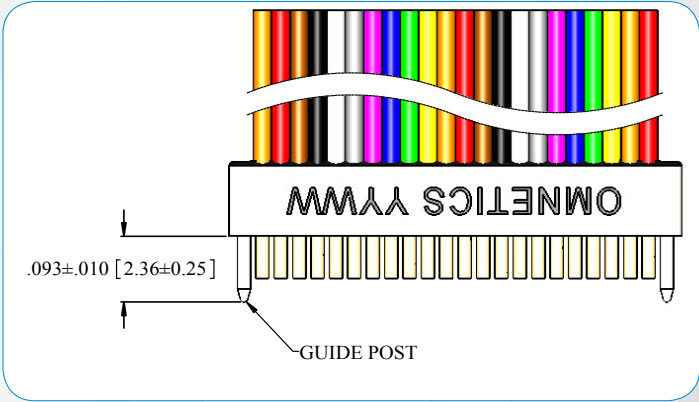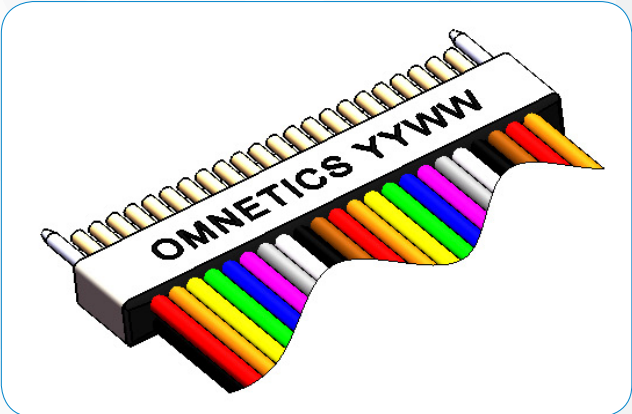

DIMENSIONS FOR "A"

To determine connector length "A":

Add the total number of contacts in one row	_____
Add 1 contact cavity for each guide post hole in the same row	_____
Total contact cavities in a single row	_____
Subtract 1 from the total to get the number of cavity spaces and multiply by .025"	_____
Add fixed end length constant	.040
Total Length (Dimension A):	_____

Notes: Maximum length .615" (15.62). Maximum number of contact cavities is 80. Number of contacts must be reduced to accommodate guide post holes. Default locations for guide post holes may be changed by customer. Dimensions in [] are in Millimeters unless otherwise noted and are for reference only.