
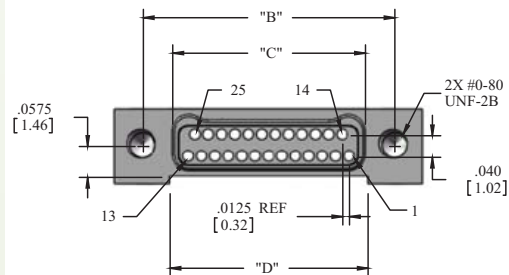
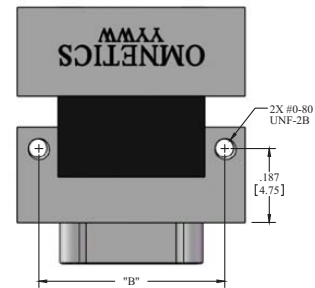
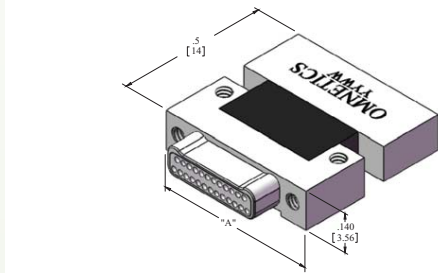
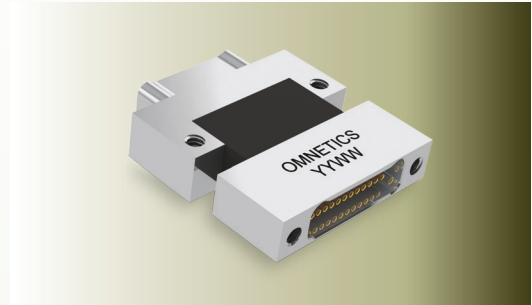


■ Bi-Lobe® Connector Savers

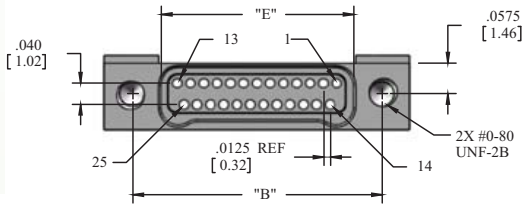

■ English (IN)

■ Metric (mm)

PART NO.	CONTACTS	"A"	"B"	"C"	"D"	"E"	"A"	"B"	"C"	"D"	"E"
■ A40828-001	9	0.375	0.270	0.160	0.170	0.163	9.53	6.86	4.06	4.32	4.14
■ A40829-001	15	0.450	0.345	0.235	0.245	0.238	11.43	8.76	5.97	6.22	6.05
■ A40830-001	21	0.525	0.420	0.310	0.320	0.313	13.34	10.67	7.87	8.13	7.95
■ A40831-001	25	0.575	0.470	0.360	0.370	0.363	14.61	11.94	9.14	9.40	9.22
■ A40832-001	31	0.650	0.545	0.435	0.445	0.438	16.51	13.84	11.05	11.30	11.13
■ A40833-001	37	0.725	0.620	0.510	0.520	0.513	18.42	15.75	12.95	13.21	13.03
■ A40834-001	51	0.900	0.795	0.685	0.695	0.688	22.86	20.19	17.40	17.65	17.48
■ A40835-001	65	1.075	0.970	0.860	0.870	0.863	27.31	24.64	21.84	22.10	21.92

CAGE Code 61873